

Breaks

You can now create two different types of breaks.


With same level breaks, the header is displayed at the same level whenever you select multiple objects for a break. The breaks depend on the layout of the table, meaning that the first break happens whenever a value of the first object in the table layout changes.

With value-based breaks, you can create breaks based on specific values that you have selected. A new Values button next to the Value-based breaks option allows you to select values for the break. The header and the footer only display for the values that you have selected. The breaks happen on the values you have selected.


When a break is inserted, the break footer is automatically filled with the default aggregate amount. If the field cannot be aggregated, it is not added in the footer.

A. Same level breaks


1. Click Analysis - Display - Break
2. Click Manage Breaks

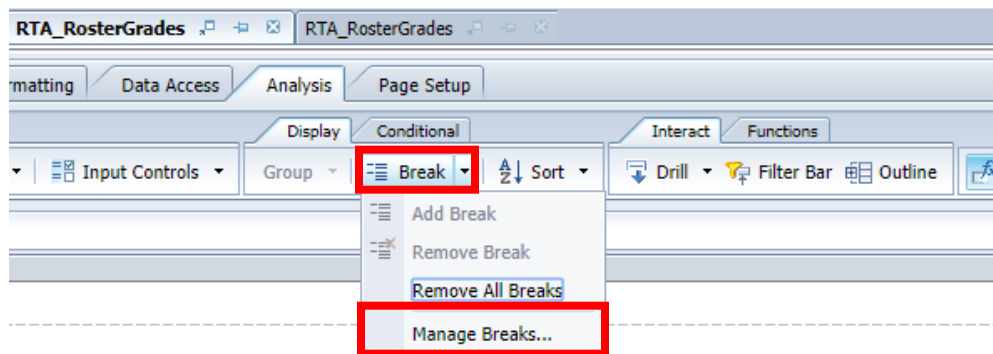


3. Click Add

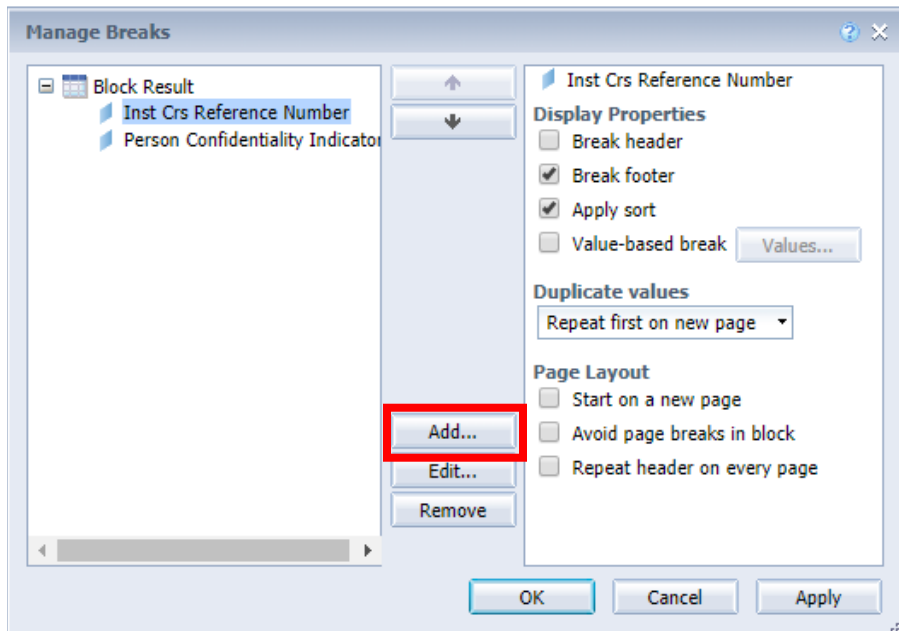

4. Select two or more objects and click OK

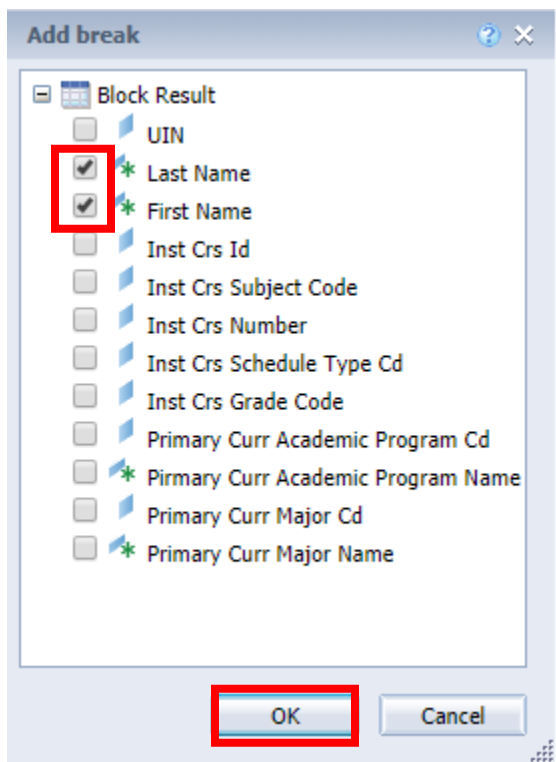


5. Back in the Manage Breaks dialog box, click OK

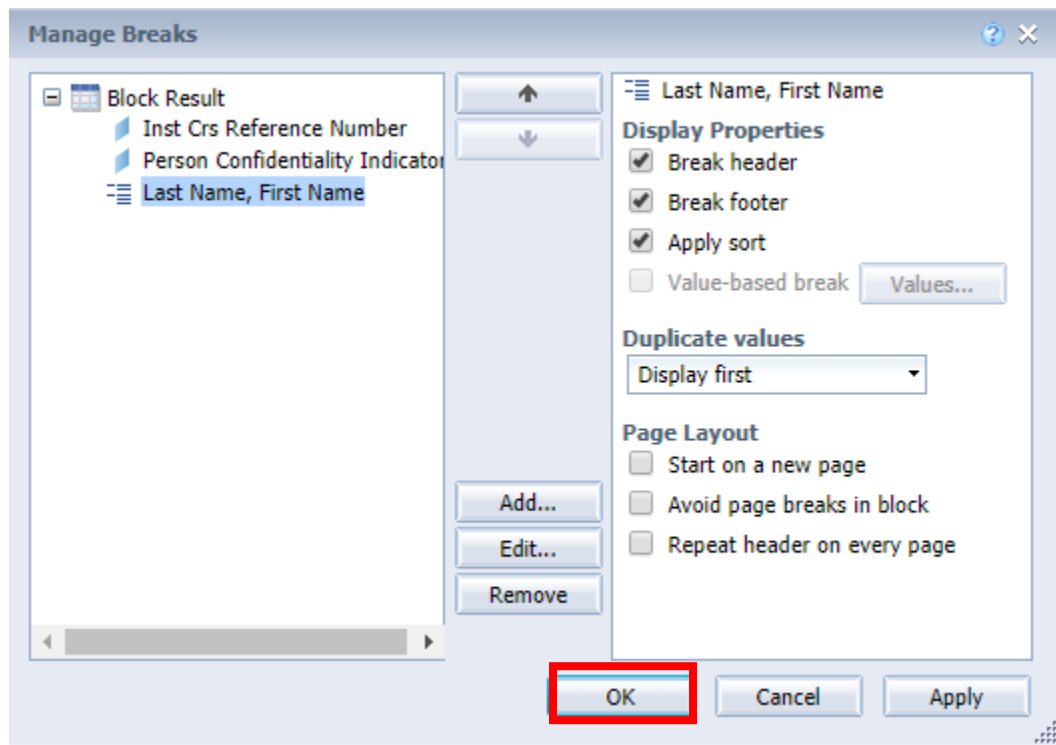


B. Value-based breaks


1. Click Analysis - Display - Break
2. Click Manage Breaks

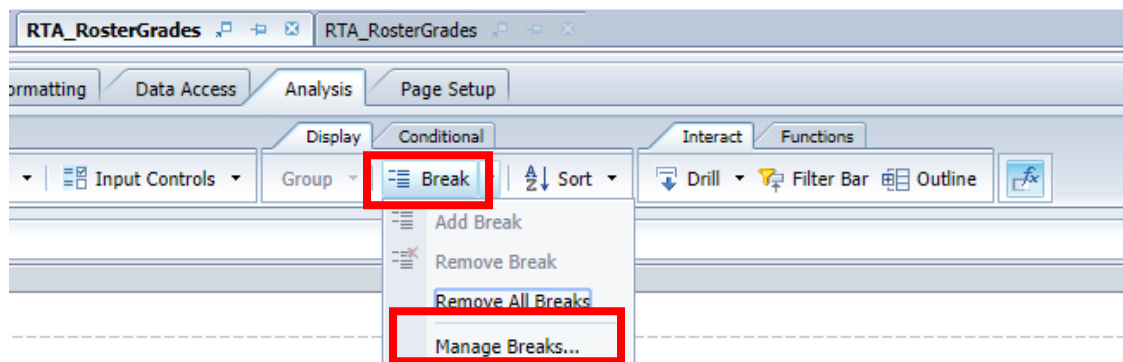

3. Check Value Based Break and click Values

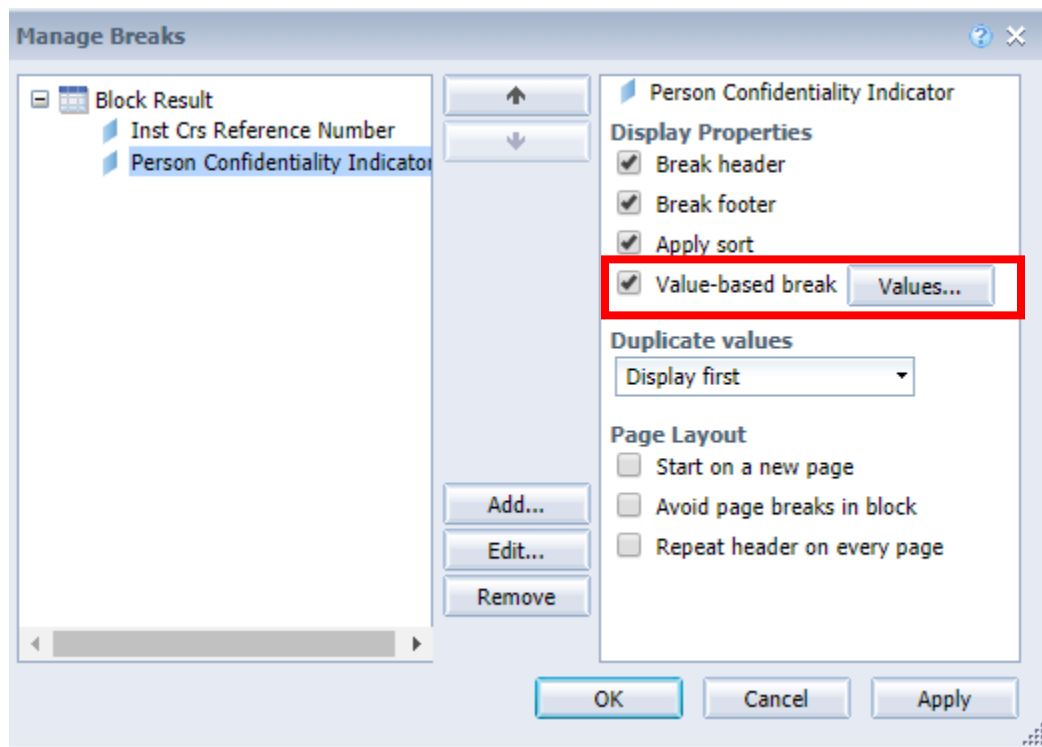

4. Select the value(s) to which you want to break to apply and click OK

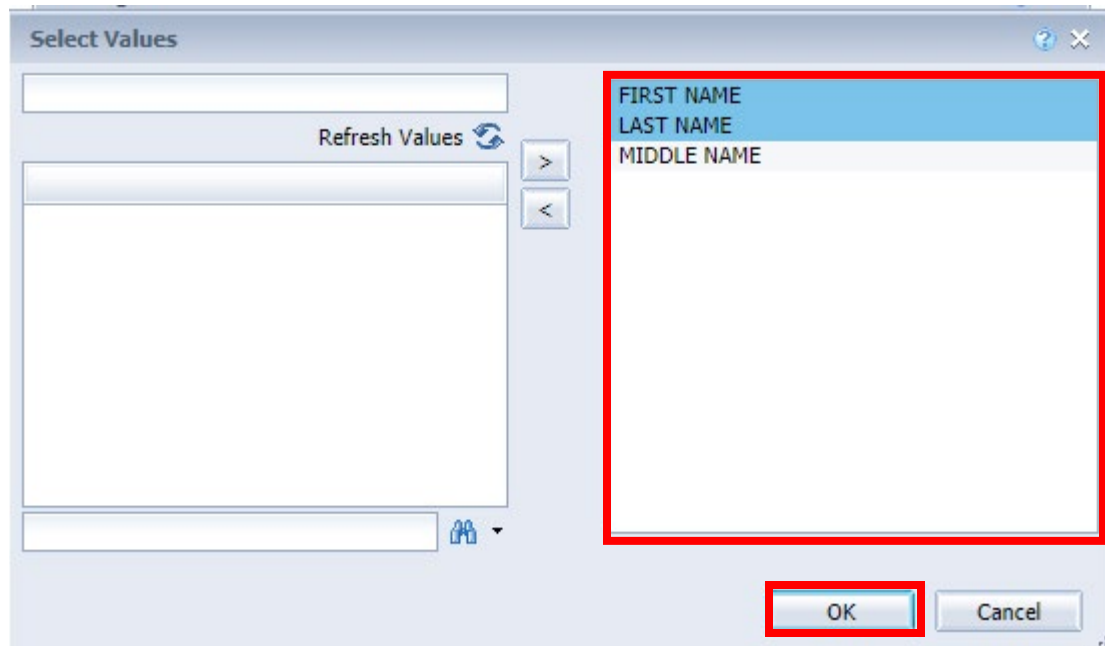

5. Back in the Manage Breaks dialog, click OK

