

Web Intelligence Rich Client Installation Guide



Contents

Purpose of this Document	2
Uninstalling Previous Versions of Web Intelligence Rich Client	2
Installing Web Intelligence Rich Client	7
Launching Web Intelligence Rich Client for the First Time	18
Launching Web Intelligence Rich Client from the Desktop.....	22

Purpose of this Document

This document will guide you through the process of installing Web Intelligence Rich Client. The installation is started from the EDDIE Settings section.

The screenshots in this document are for reference only. When installing the Web Intelligence Rich Client on your machine, the Service Pack (SP) number may differ from the screenshots below.

You will need Administrator privileges to complete this installation. If you do not have Administrator privileges on your computer, please contact your IT staff to complete installation of the Web Intelligence Rich Client.

You will also need to be connected to a University of Illinois network or have a University of Illinois VPN connection enabled in order to perform the steps in this guide.


Uninstalling Previous Versions of Web Intelligence Rich Client

The first step is uninstalling all previous versions of Web Intelligence Rich Client from your computer. This is necessary to ensure proper functioning of version 4.3.


1. Click the **Search** button icon in the bottom left.




2. Start typing 'Add or Remove Programs.' The Add or remove programs tile should appear under Best Match. Click the **Add or remove programs** tile.

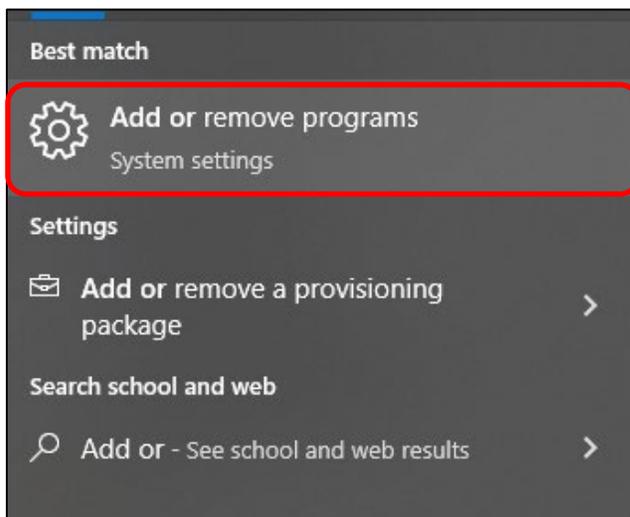


3. Scroll down the list of apps until you see the **SAP BusinessObjects Web Intelligence** entry.

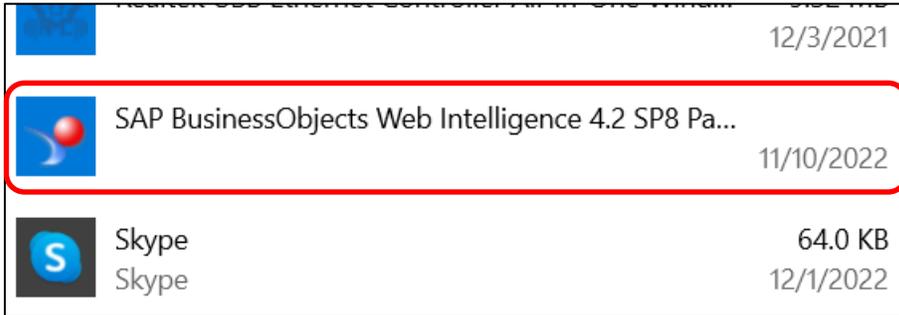

4. Expand the tile by clicking on it. Click **Uninstall**.

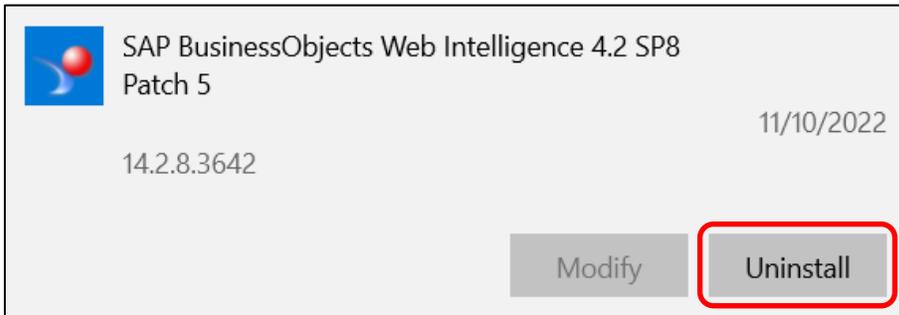


5. Click **Uninstall** again in the pop-up window.

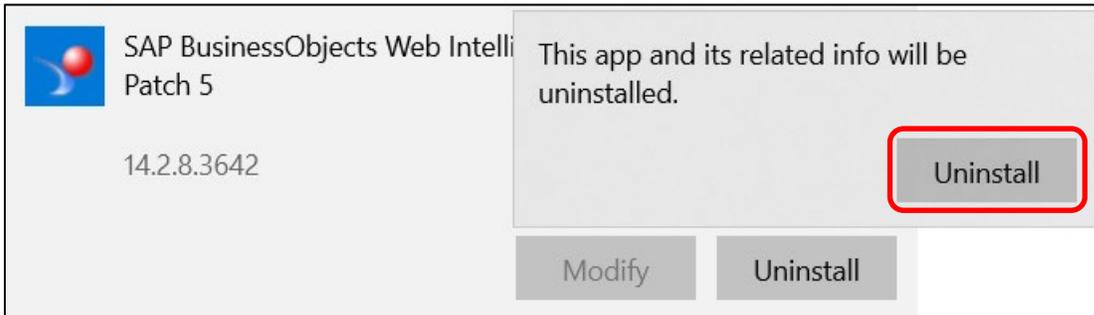


Note: If you do not have Administrator privileges on your computer, please contact your IT staff to complete the remaining steps in this section.


6. Choose **Yes** when asked if you want to allow the app to make changes to your device.

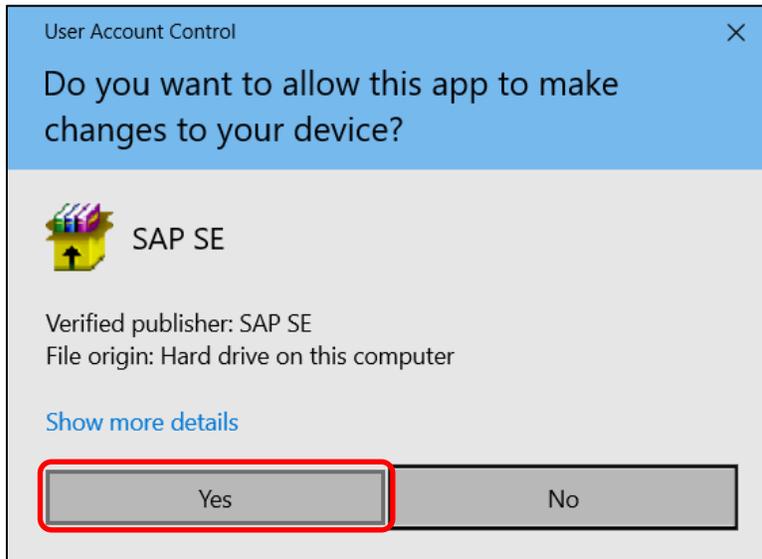


7. Select **Remove** and click **Next**.

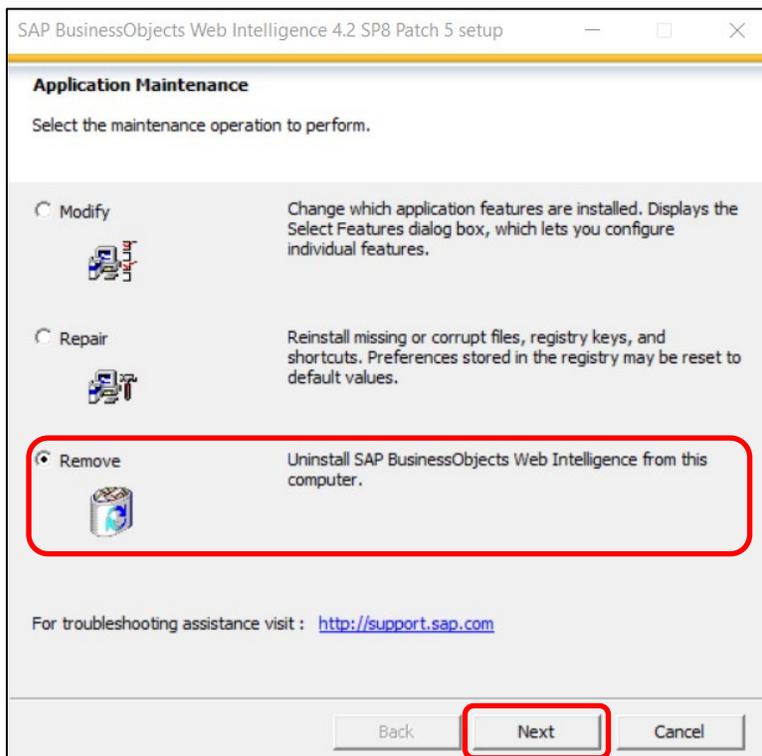


8. Click **Next** when asked to confirm uninstallation.

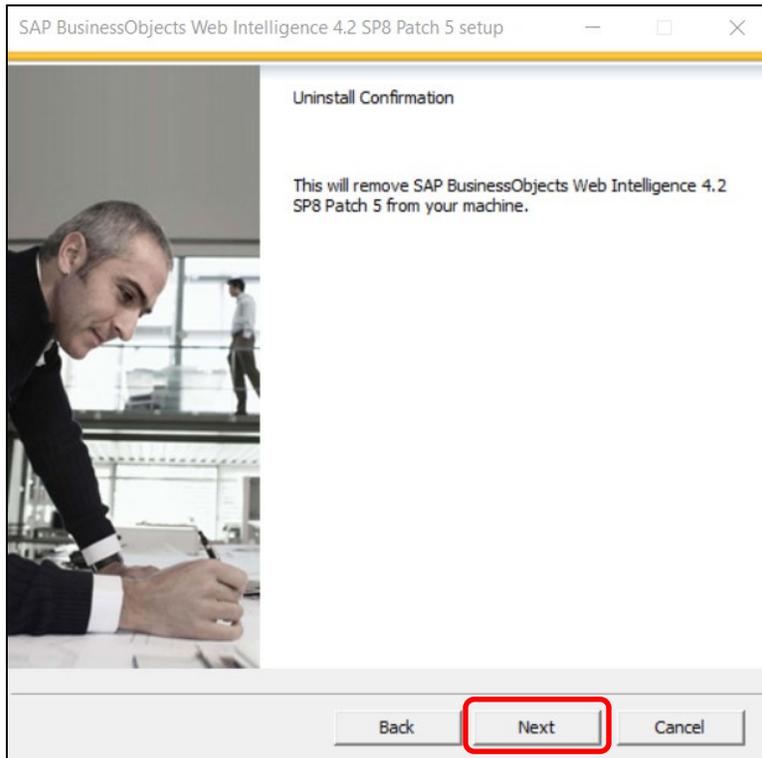

9. Allow the uninstallation process to finish. This may take several minutes.

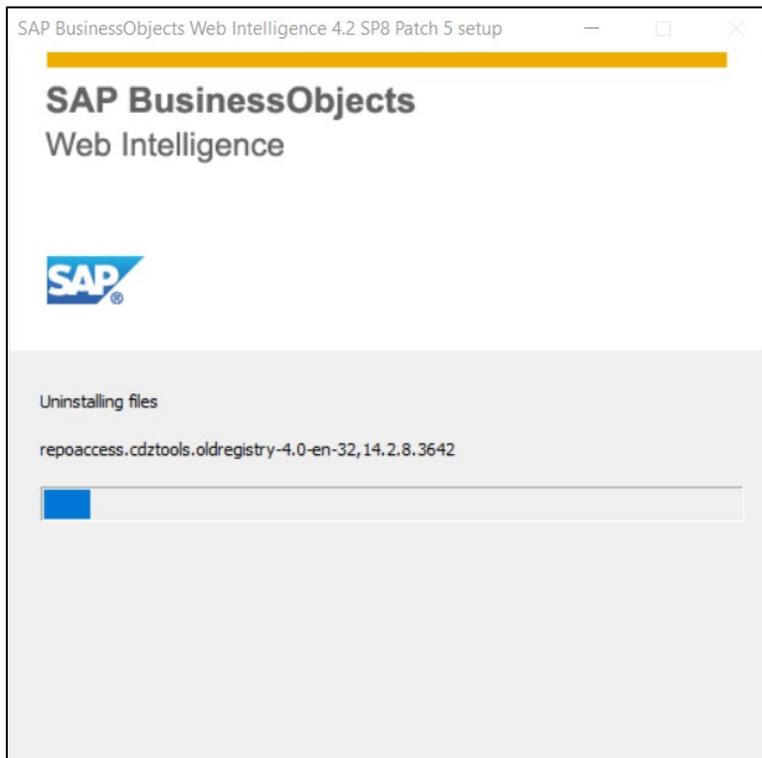


10. Click **Finish** when the process uninstallation completes.

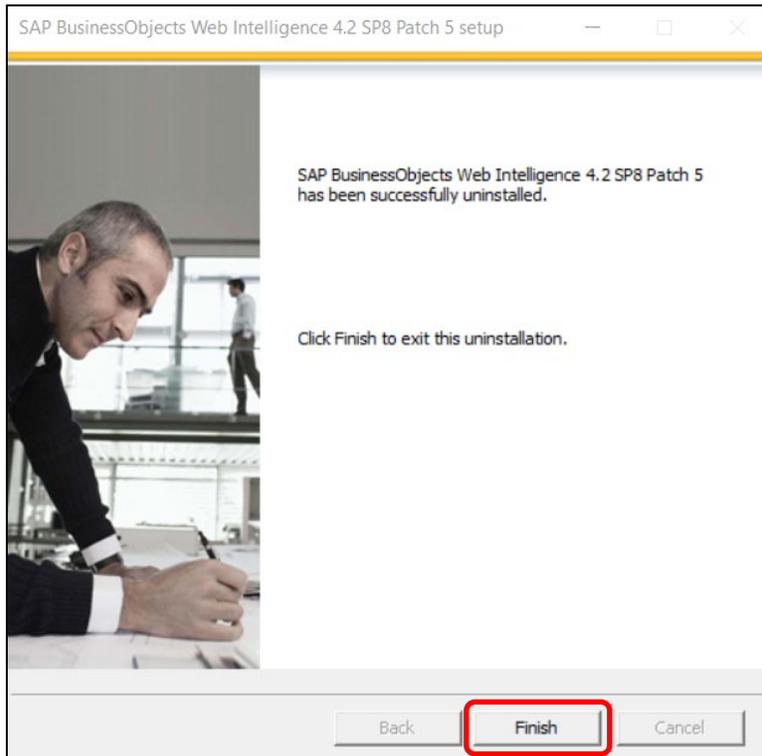


11. If your computer prompts you to Restart, go ahead and do that.

Installing Web Intelligence Rich Client

1. Open the EDDIE login page: <https://eddie.ds.uillinois.edu/>
2. Click the Log in to EDDIE button.




3. Enter your University **NetID** and **Password**, and click the **LOG IN** button.

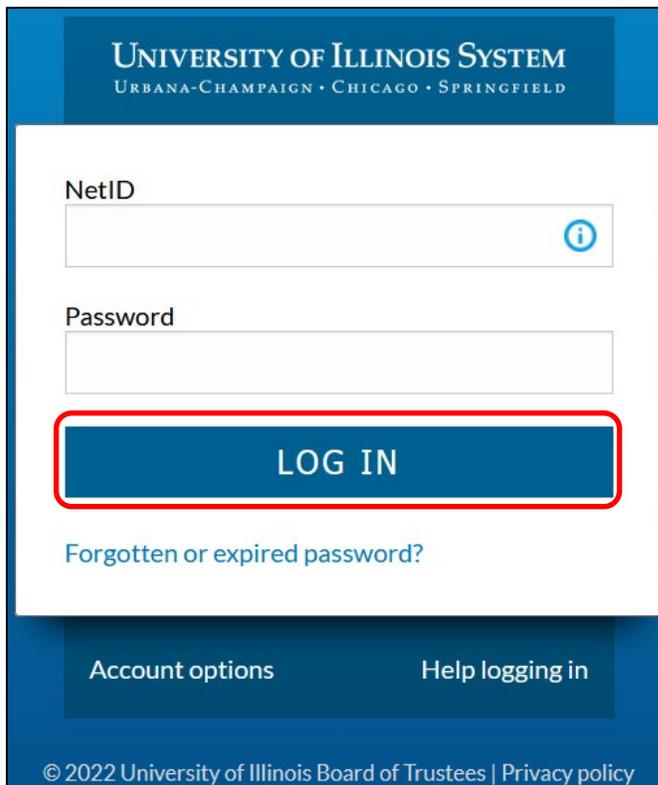
A screenshot of the University of Illinois System login page. The header is blue with the text "UNIVERSITY OF ILLINOIS SYSTEM" and "URBANA-CHAMPAIGN • CHICAGO • SPRINGFIELD". Below the header is a white form with two input fields: "NetID" and "Password". The "NetID" field has a blue information icon on the right. Below the input fields is a blue button with the text "LOG IN" in white, which is highlighted with a red border. Below the button is a link that says "Forgotten or expired password?". At the bottom of the form are two links: "Account options" and "Help logging in". The footer of the page is blue with the text "© 2022 University of Illinois Board of Trustees | Privacy policy".

Note: you will be prompted to complete a DUO 2-factor Authentication challenge before being logged into EDDIE.


4. Click the **blue circle** with your last and middle initials in the upper right corner and click **Settings**.

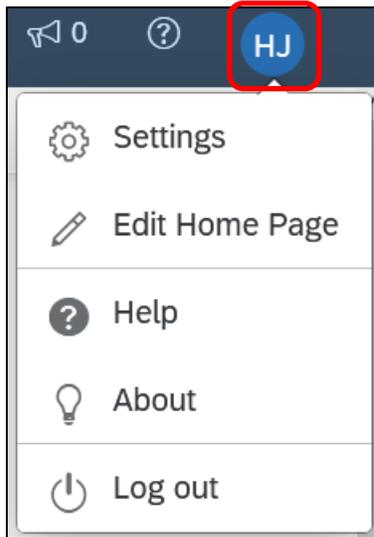


5. Click **Application Preferences**.

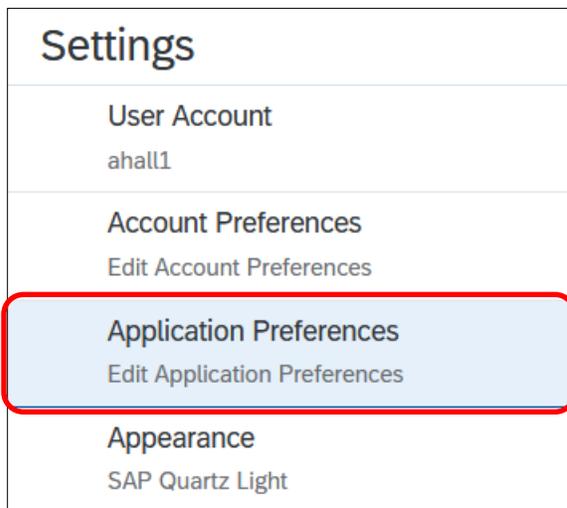

6. Select the **Rich Client** option under **Open in Edit mode:** and click the **Download** link under Rich Client Installer.

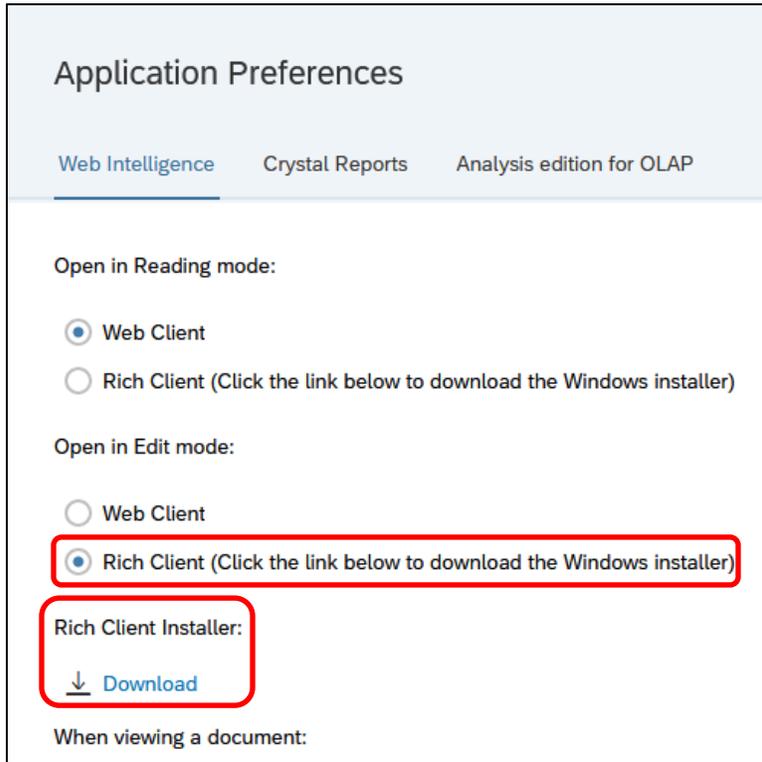


7. Click **Save** at the bottom of the screen to save the changes.



8. The installation file – WebSetup.exe – will begin downloading.


Firefox

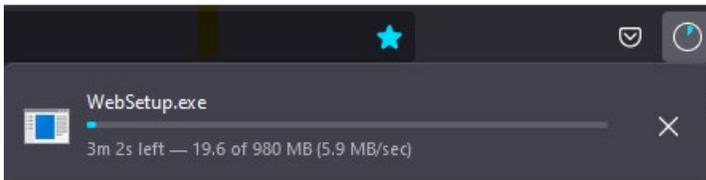

Chrome




Edge

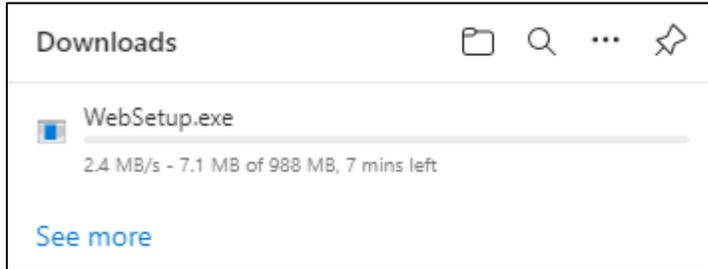


9. When it finishes downloading...

Firefox: click **folder icon** to open the folder containing the WebSetup.exe file.

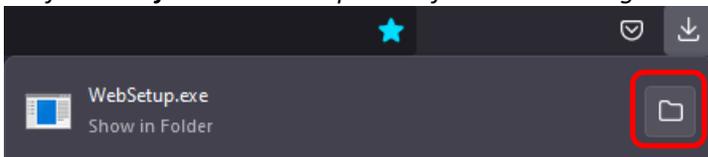


Chrome: click arrow and select **Show in folder** to open the folder containing the WebSetup.exe file.

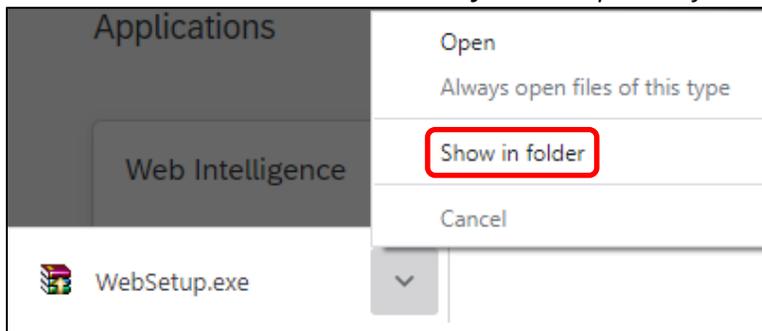

Edge: click **folder icon** to open the folder containing the WebSetup.exe file.




10. Right-click the WebSetup.exe file and select Run as Administrator.

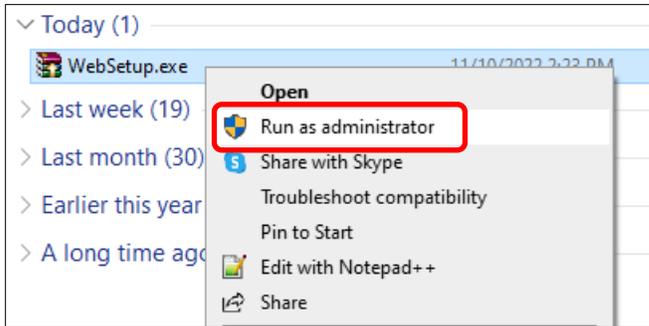


Note: If you do not have Administrator privileges on your computer, please contact your IT staff to complete the remaining steps in this section.


11. Choose **Yes** when asked if you want to allow the app to make changes to your device.

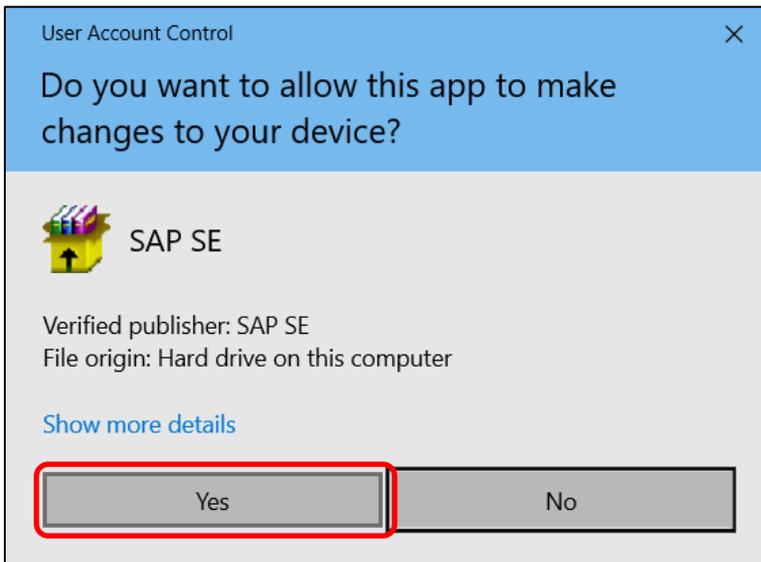


12. Choose the language you want the Setup Wizard to display and click **OK**.

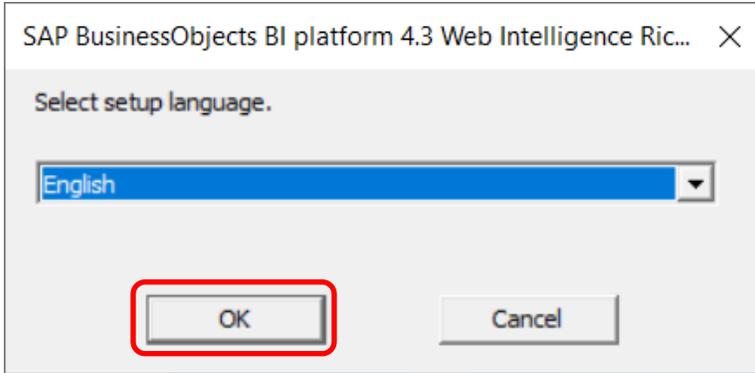


13. The application will conduct a series of checks for prerequisite conditions. Click **Next**.

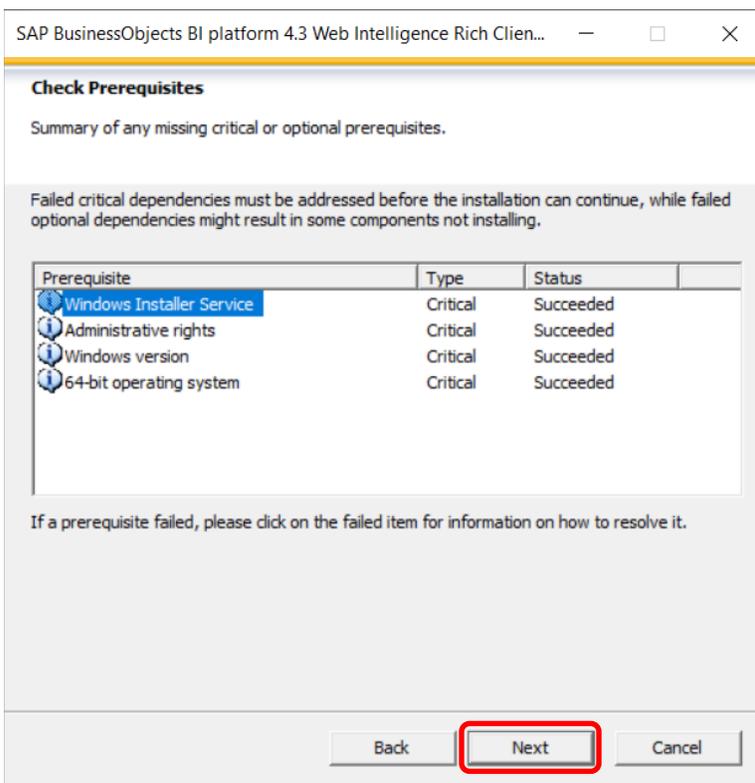


14. The Installation Wizard will begin. Click **Next**.

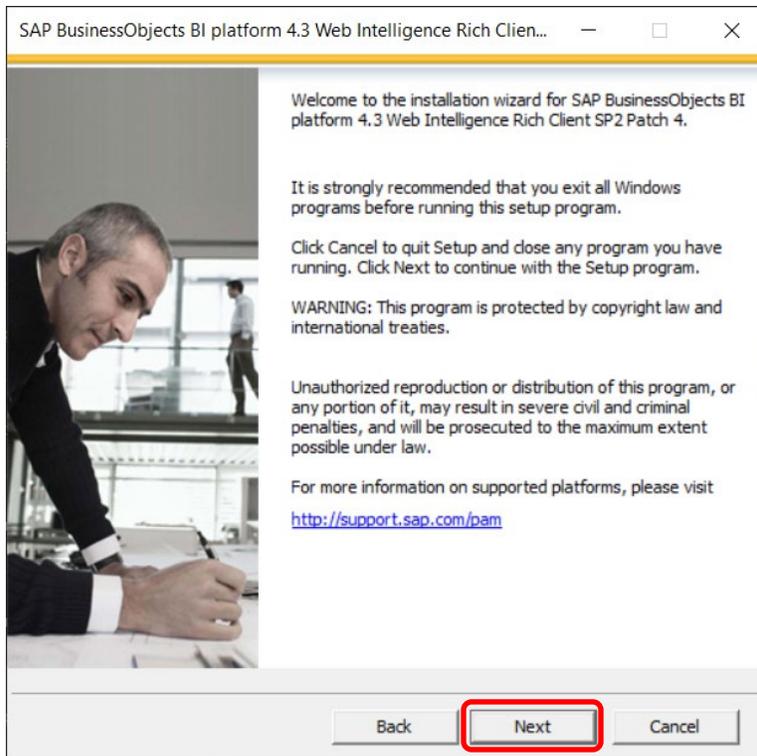


15. Click the radio button to accept the License Agreement and click **Next**.

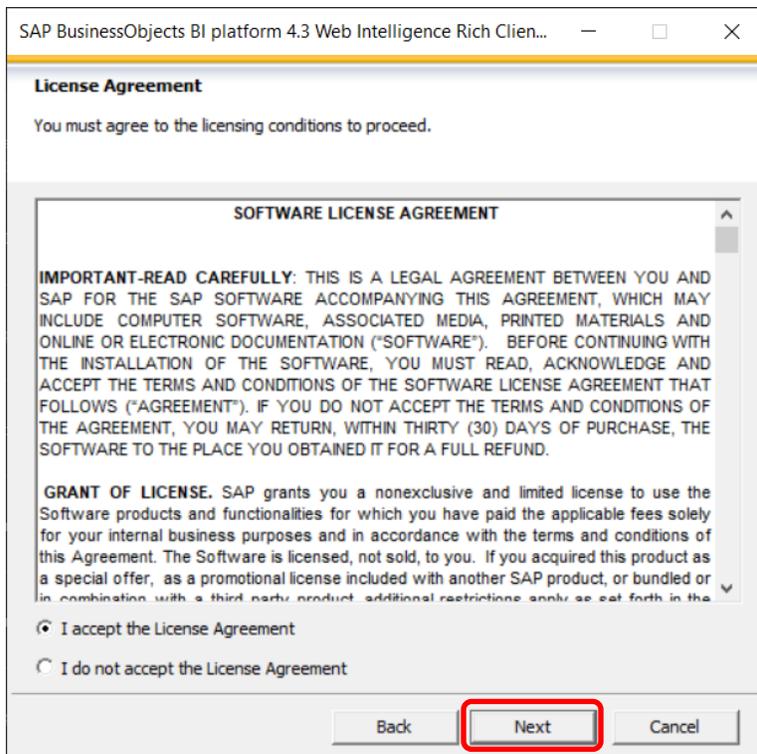


16. Use the default destination folder (recommended), or browse for your own, and click **Next**.

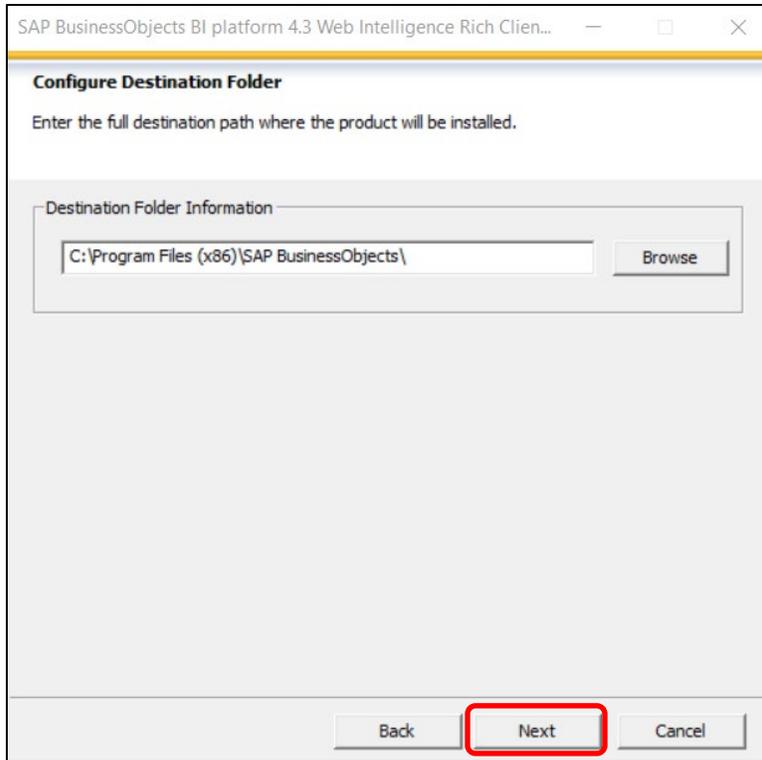


17. Select any additional Language Packages and click **Next**.

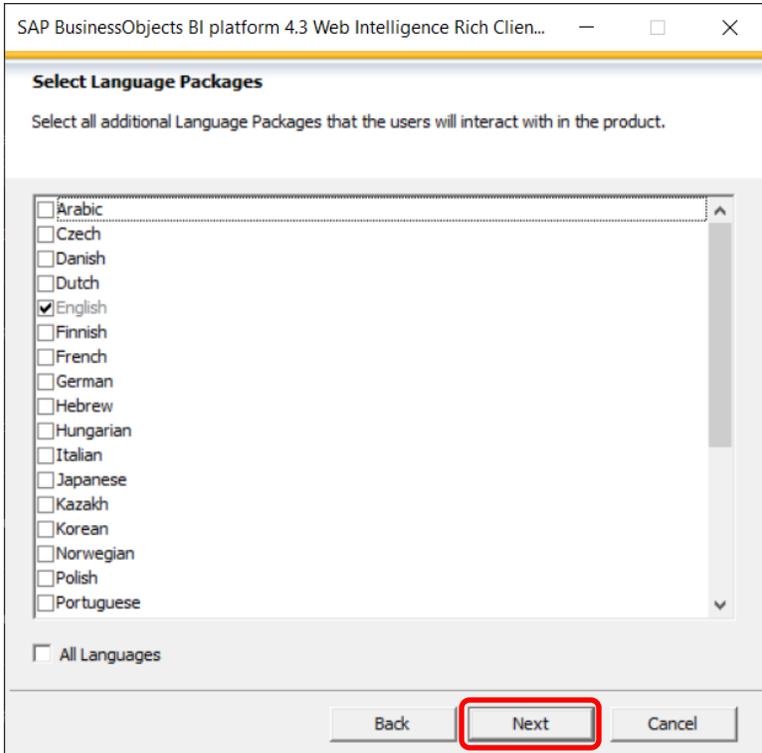


18. Click **Next** to select the default features.

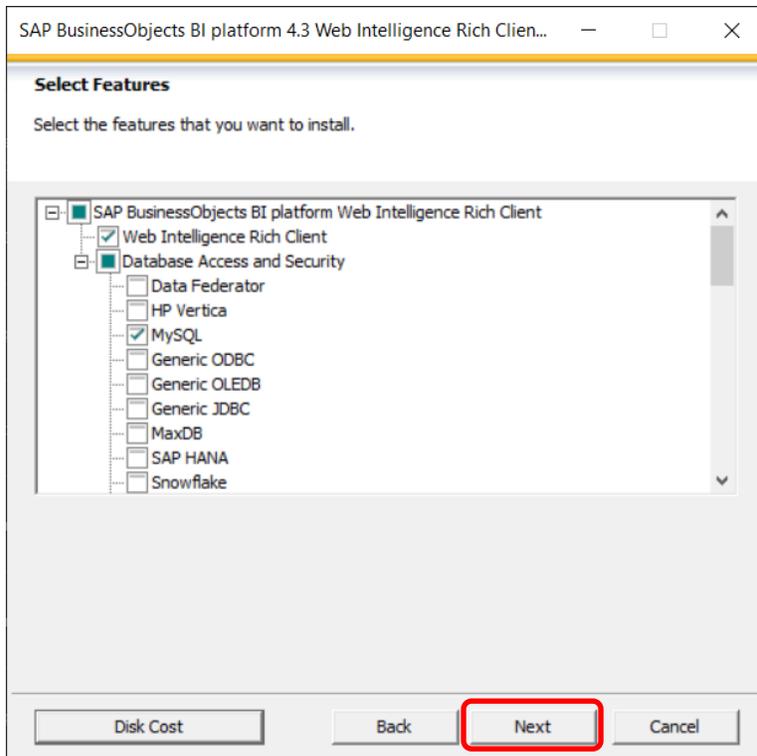


19. Click **Next** to begin the installation process.

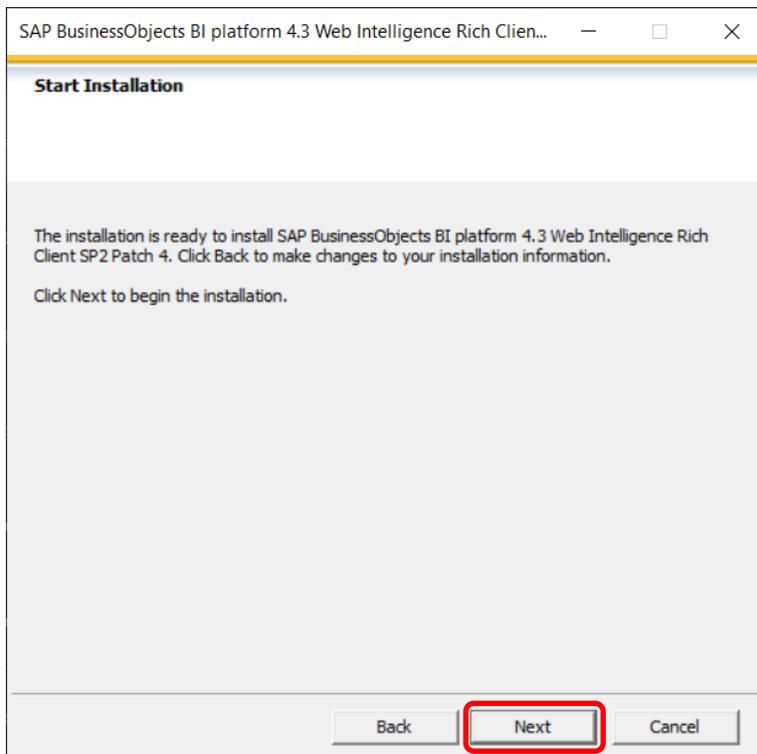

20. The installation process will install all necessary files for version 4.3. This may take several minutes.

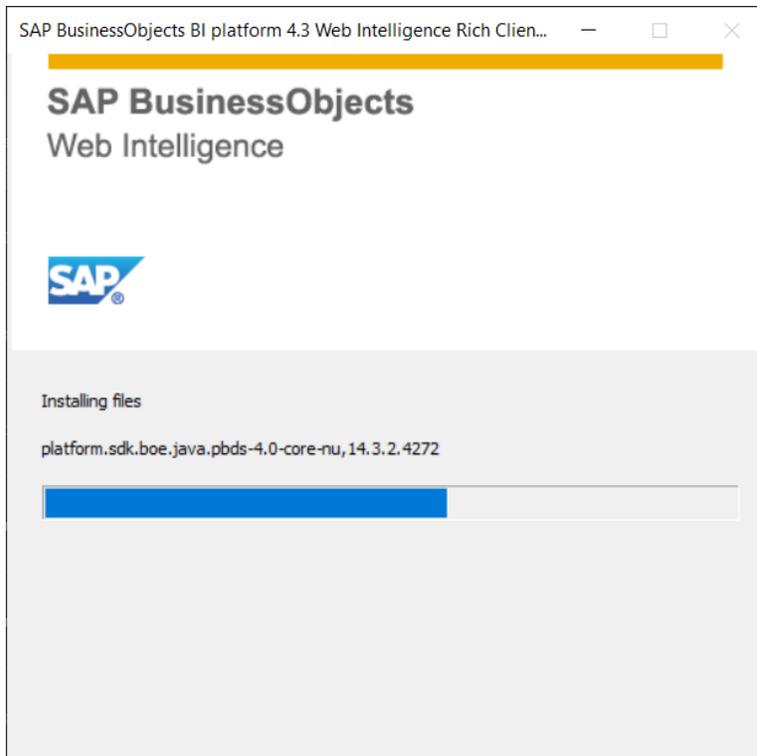


21. Click **Finish** to exit the installation.

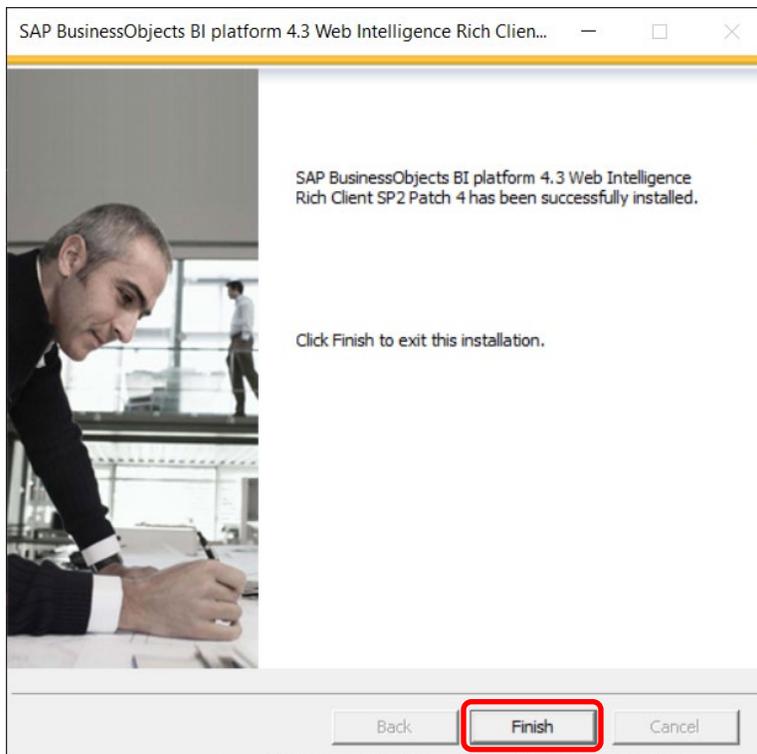


Launching Web Intelligence Rich Client for the First Time

The Web Intelligence Rich Client must be launched the first time from EDDIE. When the program is launched from EDDIE a file will be downloaded to your computer. This file is needed to be able to log directly into the Web Intelligence Rich Client from your desktop.


1. From the Home screen in EDDIE, scroll down and click the **Web Intelligence tile** under Applications.

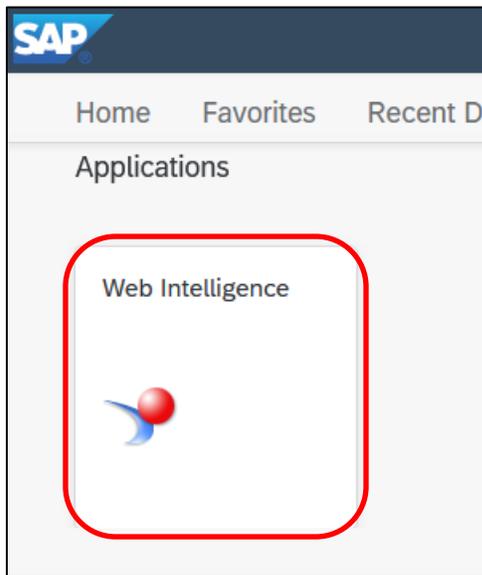


2. Navigate to where the **.zabo_wi** file was downloaded on your computer, **right-click** on the file and select **Open With**. If your computer already recognizes the association between this file and Web Intelligence Rich Client, **Open** may be an option. Go ahead and click Open.

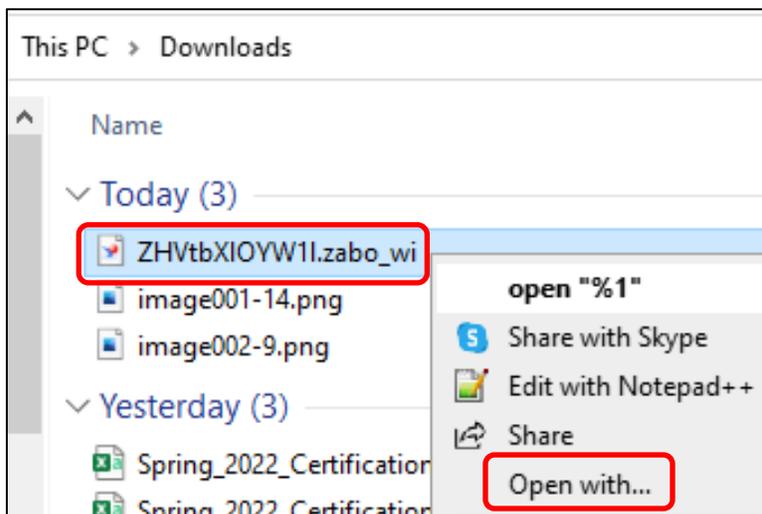


3. Select **WebRichClient.exe** and click **OK**.

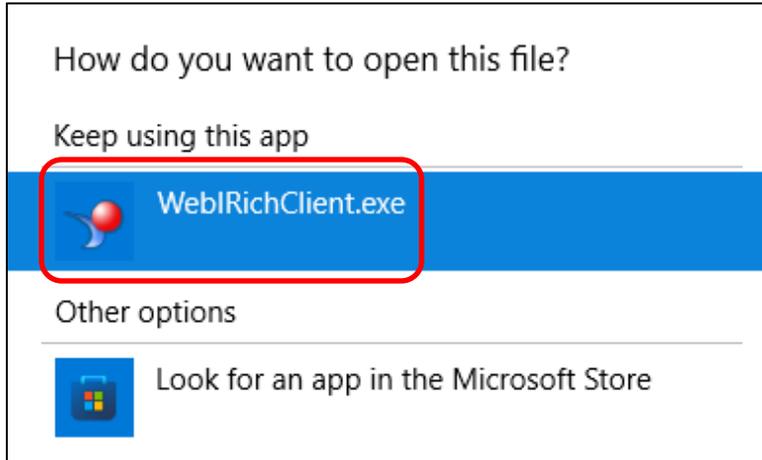


4. If you don't want to create a query at this point, click **Cancel** on the **Select a Data Source** window...

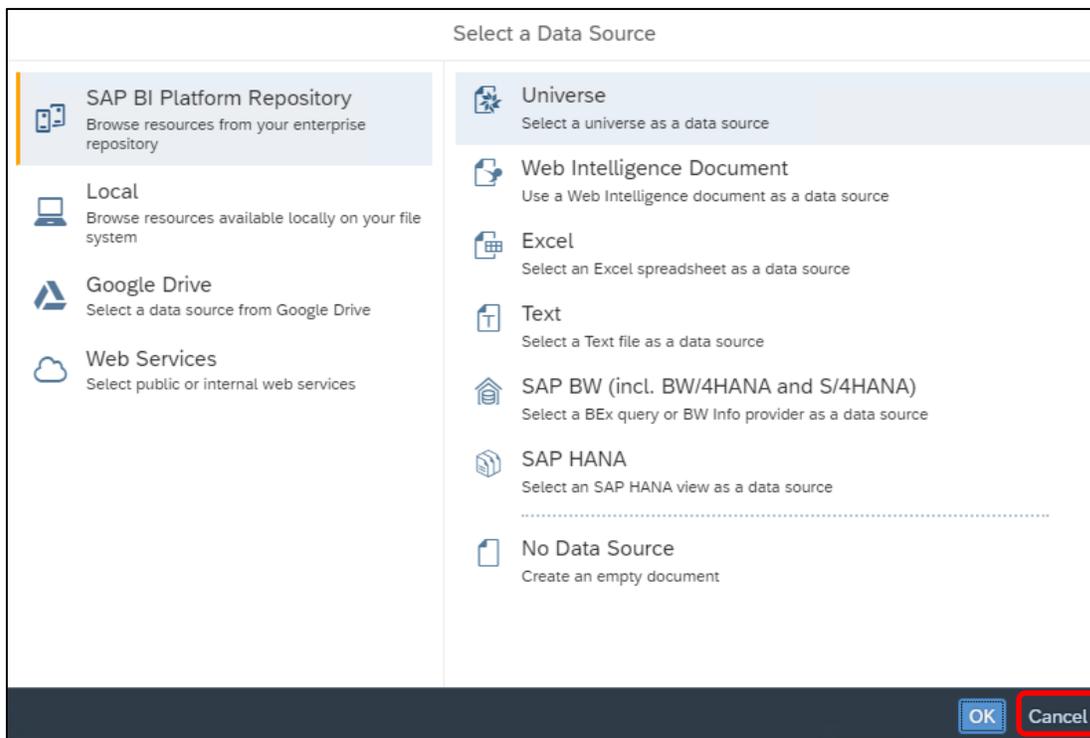


5. Then click the **Home** icon in the top left corner **New Document** screen.

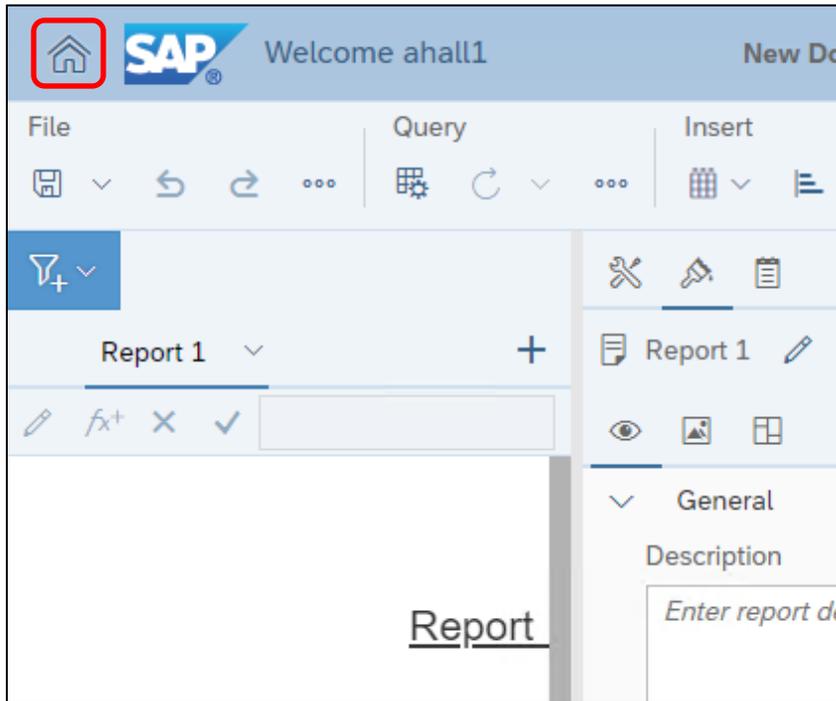


6. Web Intelligence Rich Client opens, and the **home screen** is displayed.

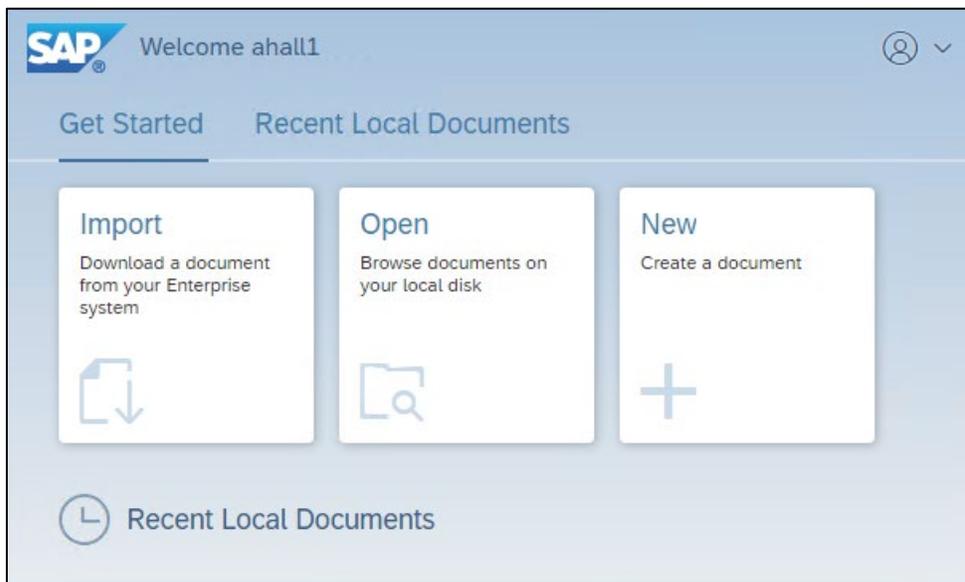

7. Exit the application by clicking the **menu icon in the upper right** corner and selecting **Exit**.

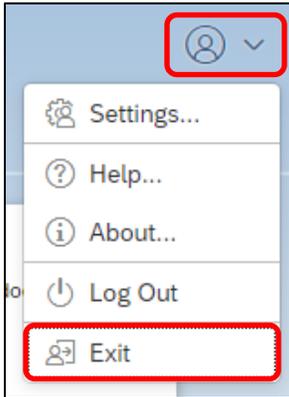

8. Click **Leave** on the message about unsaved changes being lost.

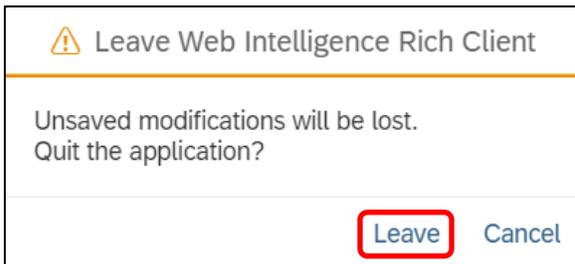


Launching Web Intelligence Rich Client from the Desktop

Once you have successfully launched Web Intelligence Rich Client from EDDIE, you will be able to launch the application directly from your desktop.


1. Click the **Windows Menu** button on your keyboard or click the icon in the bottom left.



2. Scroll to and select the **SAP Business Intelligence** folder, and then click the **SAP BusinessObjects Web Intelligence** application.

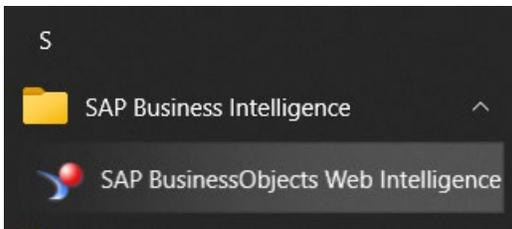

3. You will be prompted to log in and start a new session. Enter the following credentials in the Start Session screen:

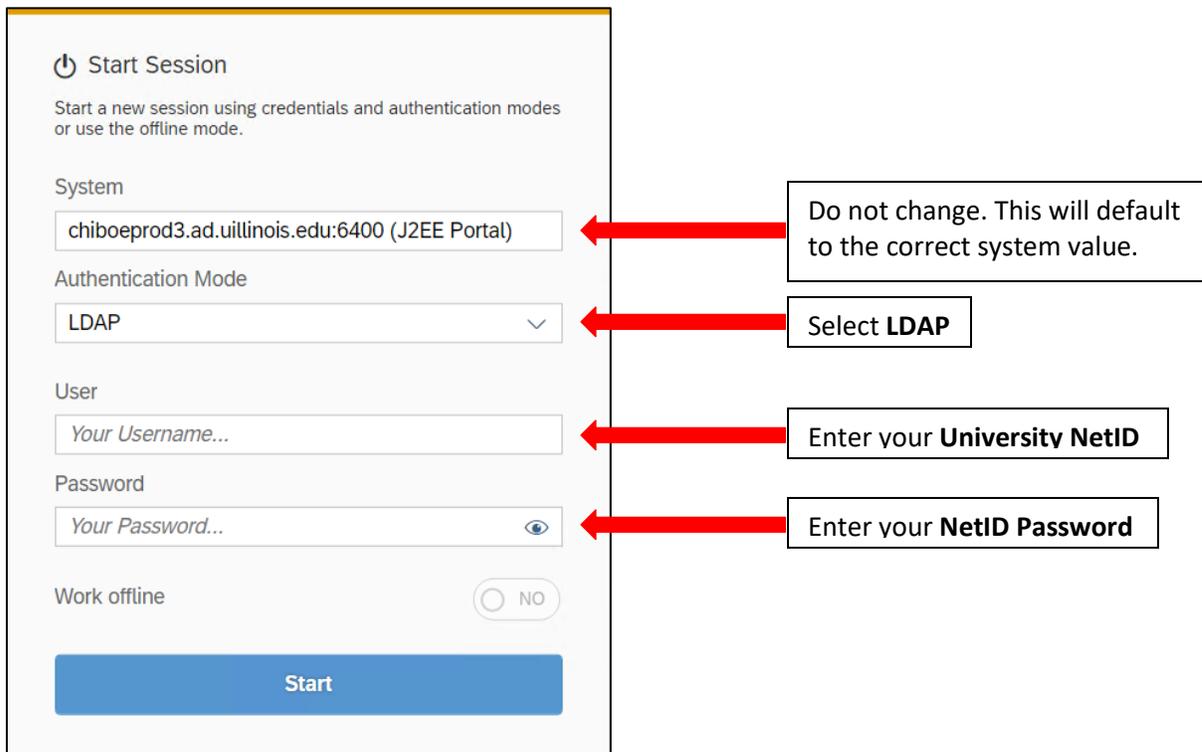

The screenshot shows the 'Start Session' dialog box with the following fields and callouts:

- System:** chiboeprod3.ad.uillinois.edu:6400 (J2EE Portal) - Callout: Do not change. This will default to the correct system value.
- Authentication Mode:** LDAP - Callout: Select LDAP
- User:** Your Username... - Callout: Enter your University NetID
- Password:** Your Password... - Callout: Enter your NetID Password
- Work offline:** NO (unchecked)
- Start:** A blue button at the bottom.

4. Click **Start**